

CO2 Laser Coder  
LM Series

**HITACHI**  
Inspire the Next



Coding Solutions **by Hitachi**



# CO2 Laser Coder LM Series

A robust, versatile, high performance laser for industrial coding requirements

## A robust, versatile, high-performance laser for industrial coding requirements

The new LM Series from Hitachi is a Carbon Dioxide CO2 based Vector laser. Our wide ranging of wavelengths as well as the flexible power and focal lens configuration ensures performance ideally suited to coding on various packaging substrates including paper, cardboard, glass or plastics. An innovative cascading cover design supported by an efficient cooling air stream provides a high level of reliability. The result is a very low electrical energy consumption and precise, clear coding even at small font sizes. Small outer dimensions and powerful on-board control system enable easy hardware and software integration of the LM series into factory networks.



## Our highlights

- Compact single body space saving design for ease of mechanical integration
- An electrical power consumption of <300 VA reduces the overall operating costs to a minimum
- Low laser power and duty cycle translates to increased reliability and increased safety due to low operating temperatures
- Dual casing structure provides additional protection for the laser tube and optics which ensures durability against harsh environments
- Laser Tube and Optics are classified and rated to IP65
- Most efficient air cooling by a cascading cover design extends laser tube lifetime
- Optional lens air flow available to keep the focal lens in a clean condition
- User-friendly interface: PC based or with an optional colour 10.4" Touchscreen
- Highest print quality at a variety of production speeds using vector as well as Dot Matrix fonts with a user friendly font editing tool
- The beam expander technology creates a very small spot size transferring a high level of energy onto the substrate resultant in a high resolution print
- Powerful Windows software available for networking, status control and for designing the text layout with True Type fonts, 1D & 2D barcodes and logo files.
- Wavelengths of 9.3µm, 10.2µm and 10.6µm combined with various lens options allows for coding onto a wide range of substrates
- All wavelengths are available in 10W and 30W
- Flexible Input/Output connections for ease of integration, 12 programmable inputs and four programmable outputs

# Easy Operation




The user friendly colour 10.4" touchscreen is ready for immediate use



### Intuitive operation


Our new, icon-based 10.4 full colour touch panel provides easy and straight-forward navigation. The WYSIWYG design provides stress-free operation by displaying marking data and settings immediately. The touch panel is easy to use in both handheld and equipment-mounted configurations.

### Integration of different coding equipment

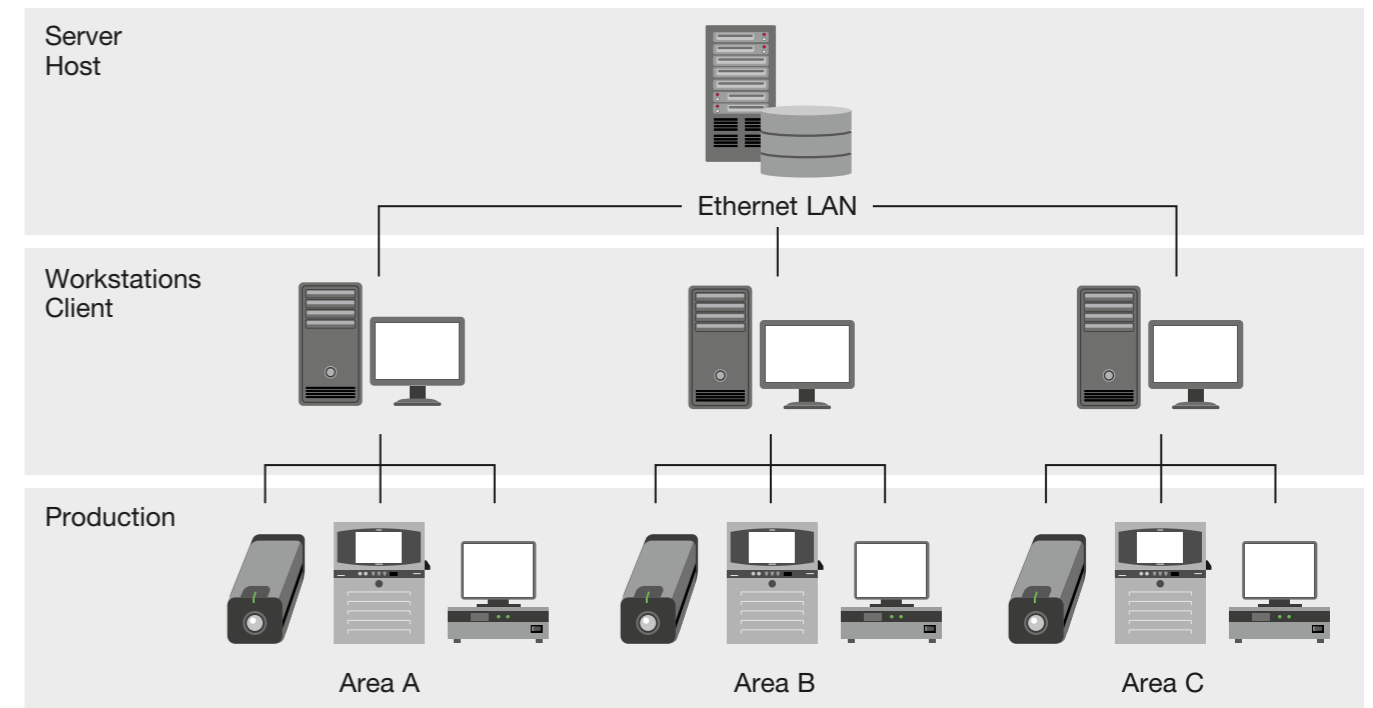


### Control with standard PC equipment


The LM Series can also be operated with standard (industrial) PC equipment. The windows based laser application supports multiple text layers, secure image storage operations, preview image before downloading, manage and download the laser setup for individual products and provides WYSIWIG image design. Additional features include database connectivity, an easy to use font editor, powerful time and date calculations, management of log files and creation of reports. By utilizing the Laser Application Software no touchscreen panel is needed to fully operate the laser.

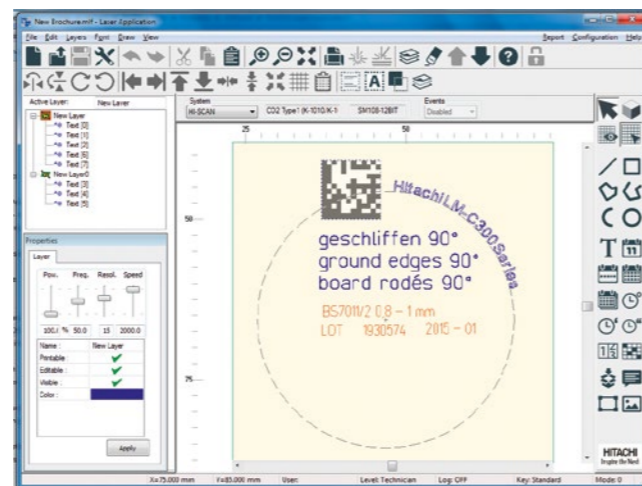

### Offline configuration

Data can be created and saved via a remote PC and then transferred into the laser coder located at a remote site. The USB port of the laser coder offers a convenient way to share image files or machine settings between the laser coder and the host PC. A quick backup of the most important data is ensured and further ease operation with the LM-C300 Series.

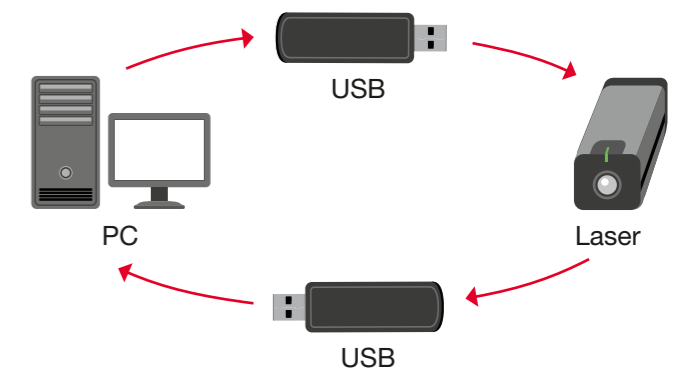

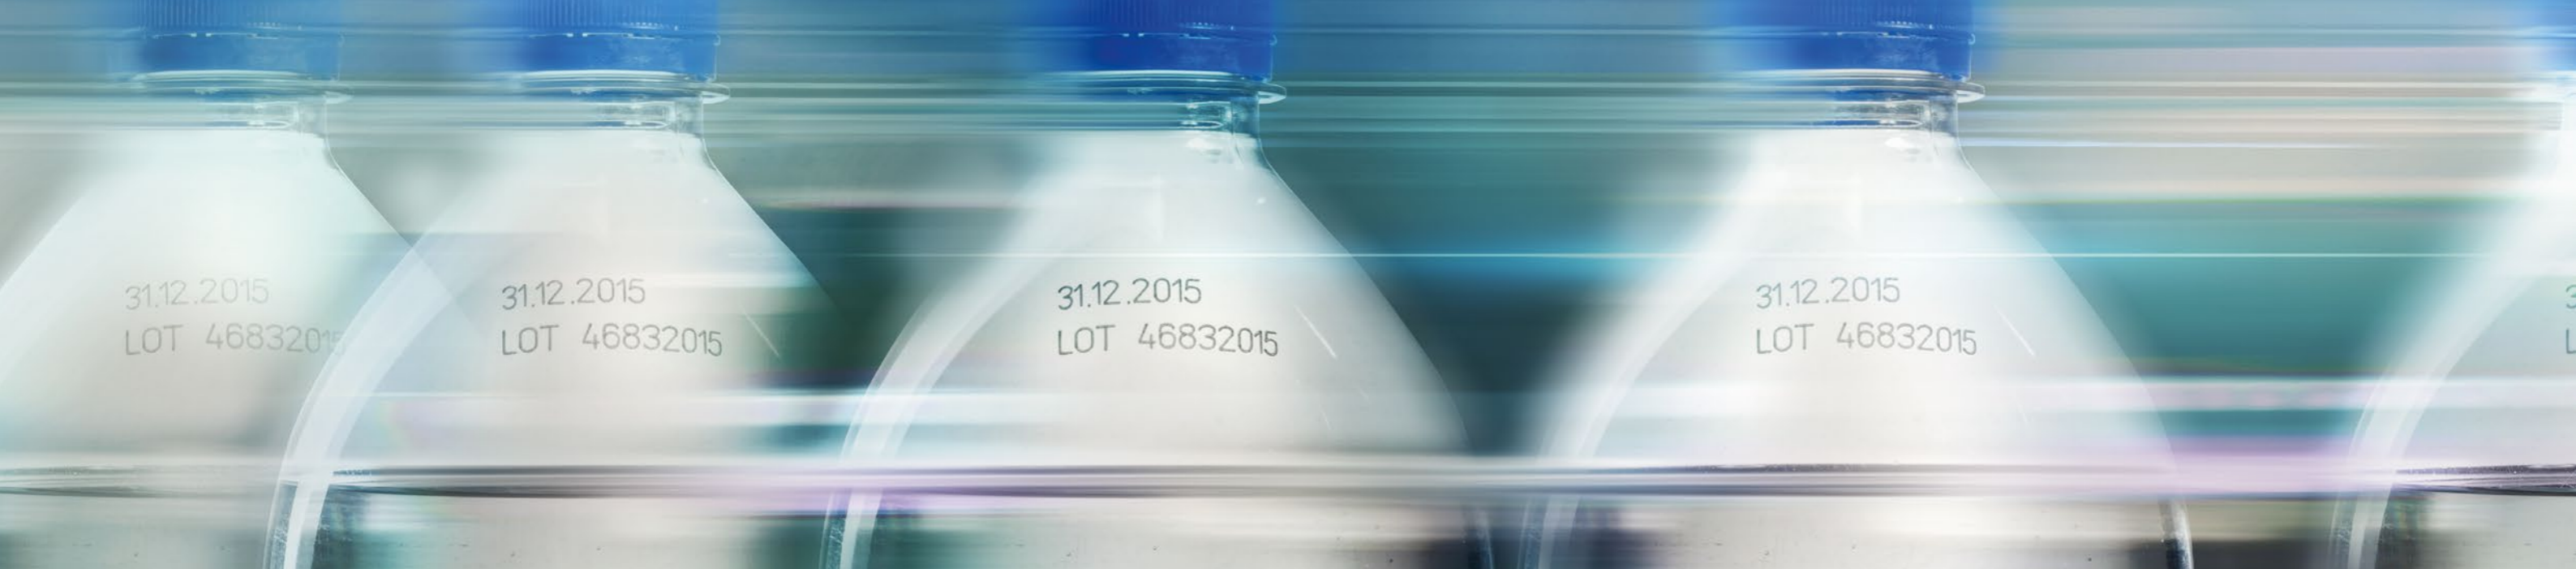

# Speed & Quality

◎文字サイズ (代表例)

0123456789  
 ABCDEFGHIJKLMNOPQRSTUVWXYZ  
 abcdefghijklmnopqrstuvwxyz

◎扇状印字

0123456789  
 ABCDEFGHIJKLMNOPQRSTU  
 abcdefghijklmnopqrstuvwxyz

◎漢字・カタカナ

製造年月日 品質保証期限 照会番号  
 入力 出力 日本製 数量 定格電圧  
 品名 種類 型式 ロット 消費電力

◎傾斜状印字

0123456789  
 ABCDEFGHIJKLMNOPQRSTU  
 abcdefghijklmnopqrstuvwxyz

◎2次元コード

QR

◎バーコード


CODE 128

## Accurate coding at high speed

Even at high speed the LM-C300 Series maintains an accurate and aligned coding process. The new laser generates energy instantaneously and transmits it onto the product in a very fast time. The beam expander technology further reduces the focal point and generates extremely sharp and clear characters and vector lines onto the packaging material. Even though the LM-C300 series is a vector font based laser, dot matrix fonts can be printed on demand as well.

## The font editor

Each character of a font can be manually modified and aligned to the application requirements. True type fonts and laser fonts can be opened and changed plus some areas of an image might require a deeper and more powerful marking than others. In order to avoid pin holes, the individual character line can be interrupted at any point. The package keeps its consistency and the product is safely protected.

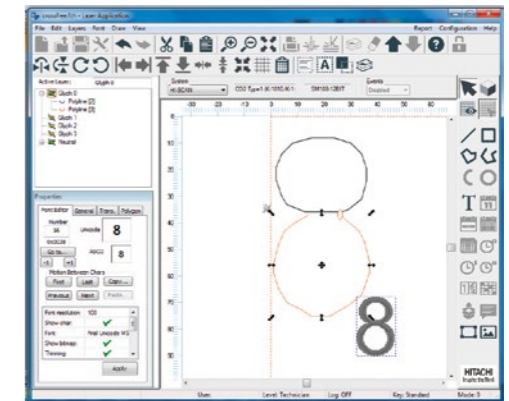


## High speed coding at 600 cps

Hitachi's new laser is capable of printing up to 600 cycles per second (cps). This high performance scribing process can be achieved through the use of a new dynamic and precise optic assembly. The overall weight of all moving parts has been reduced to a minimum which results in a faster marking time. The edges of each character remains correctly marked with no degradation of the character form despite the high speed.



## Depth control

The LM-C300 Series offers many system settings which control the power of the marking at areas susceptible to deep marking such as beginning and end of lines where straight and curved lines intersect. Unwanted dots or even missing lines are being prevented. The dynamic depth control also removes less material from the product package and therefore extends the filter life time of the fume extraction system.

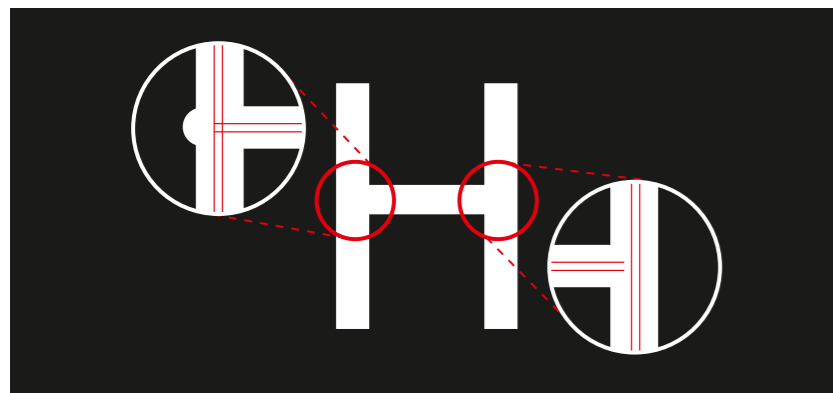

## Intersection correction

Our LM-C300 Series offers a support function for crossless lines, which prevents deep marking where lines intersect, eliminating the tendency of overlapping lines to distort the shape of output characters. These crossless fonts have been engineered and designed by the powerful font editing tool which is available as part of the laser application software.

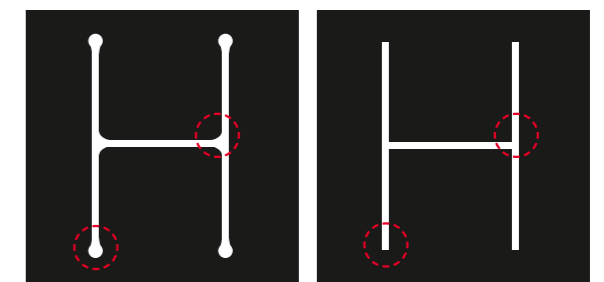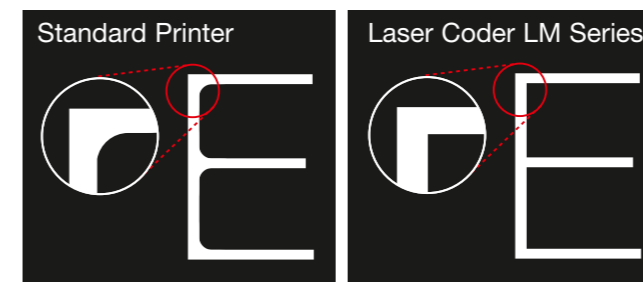


# Proven Reliability

A robust, versatile, high performance laser for industrial coding requirements


## Advanced cooling System

Low power air cooled laser systems are the only compact laser technologies demanding less floor space and providing ease of mechanical integration into complex packaging lines. The new cascading cover design and the most efficient cooling air stream leads to a high level of reliability and extends the lifetime of the laser tube significantly. The new Hitachi laser achieves IP54+ protection due to cascaded laser tube and enclosed optical box.

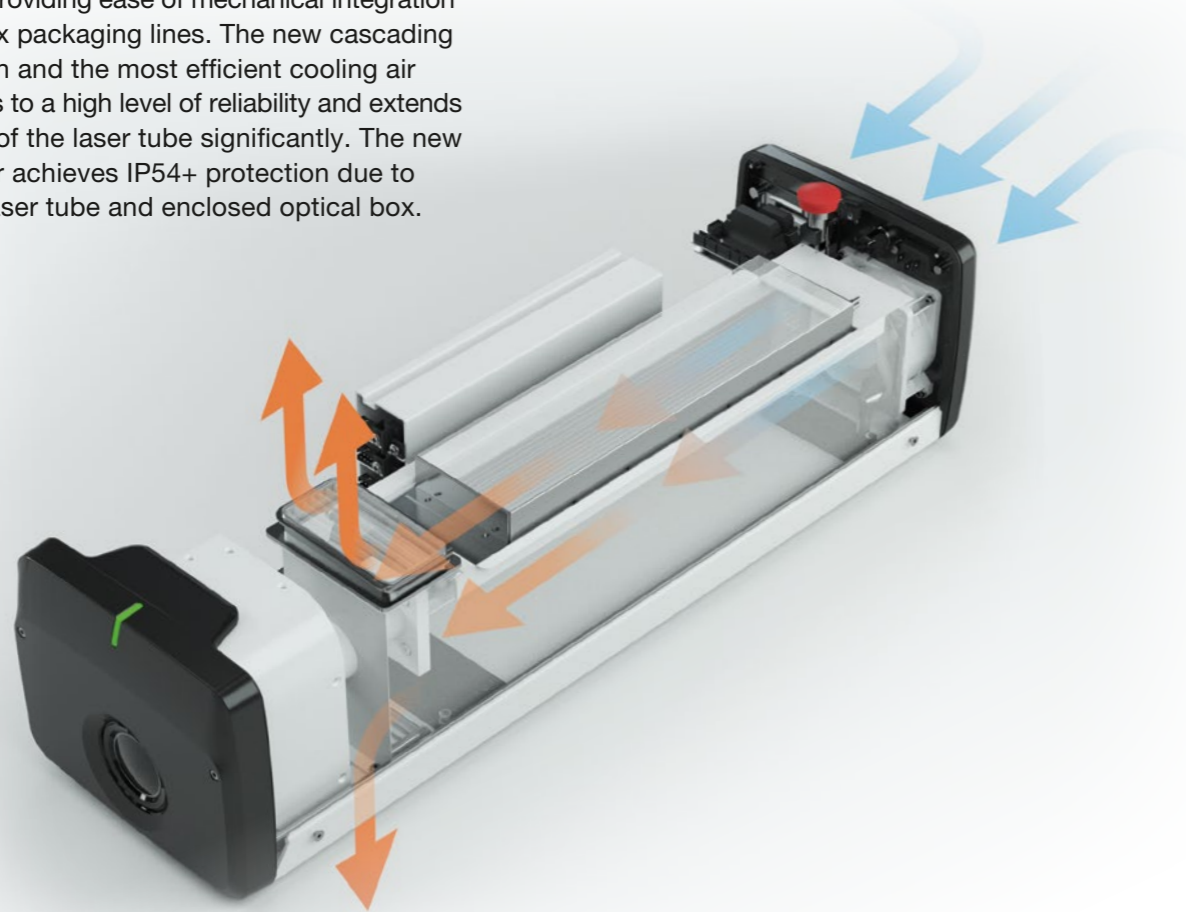

## Optional lens air flow


An optional air flow helps keep the focal lens in a clean condition. The overpressure keeps any kind of particulate off the lens assembly, avoids contamination and therefore reduces laser output power. This option helps to reduce operating costs, minimize maintenance and increase print quality.

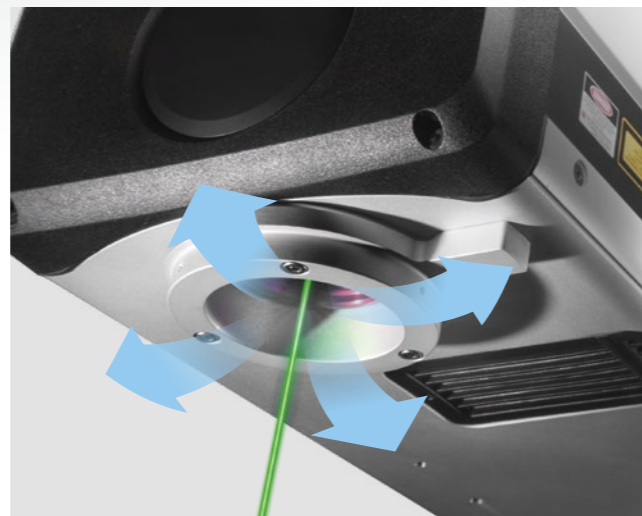

## Energy efficiency

Efficient usage of the laser energy creates a low-cost laser coder with a total power consumption of <300 W! Our low operating cost LM-C300 series uniquely apply up to three times less power to execute the image process than other lasers. The new Hitachi technology produces the print quality and speed of competitor lasers that typically require far more power.

As a standard feature the LM-C300 series directly controls Hitachi's fume extraction solution. The remote Start/Stop functionality activates the fume extraction only if the laser is switched into print

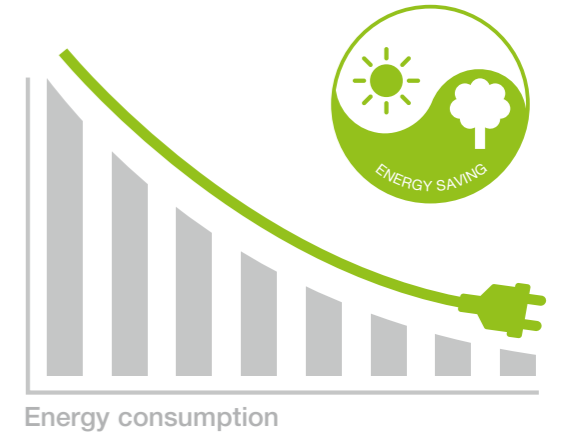

Energy consumption

mode. No energy is consumed if the laser is switched to offline mode. The total power consumption of Hitachi's laser and fume extraction solution is reduced to a minimum.

## Harsh environment

With the robust structure which provides a high level of protection for the laser tube and optics, the new LM Series can be used in extremely harsh production environments and meets IP54 accreditation. The laser tube and the optical assembly are additionally protected and even achieve a higher IP+ certification. Regular cleaning of the mirrors and the lens assembly is no longer required and less operator interference further reduces running costs.



## Global sales & service network

Are you looking for a proven global company that can work with you at a local level? Hitachi offers a global sales and service network when marking, coding and traceability challenges demand a coordinated answer. For each of your locations, and across your entire organization we will champion your goals by providing international consistency, global perspective, broad expertise and coordinated service with dedicated contacts. Our global team applies its worldwide technical

expertise to your unique challenges in a consistent way. Tangible deliverables and proven solutions are results of our business analysis and project implementation. Mechanical integration supported by 3D CAD design, electrical schematics, customized circuits, application specifications and customized documents. Plus cross border project management and coordination between suppliers, OEM's and end users are part of our deliveries. You gain more visibility and save time and money.

# Packaging materials

The world of packaging consists of a huge variation of different technologies and materials including paper, corrugated cardboard, glass, rigid plastics, flexible foils and films to name a few. To handle this diversity of materials Hitachi's LM-C300 Series comes with two different output power levels – 10W and 30W – and with three different wavelengths: 9.3µm, 10.2µm and 10.6µm. Remember each material and composition does adopt, absorb and reflect light in a different way.



## PET – 9.3µm Wavelength

Perfectly matched for the head absorption of plastics like PET (Polyethylenterephthalat), the 9.3µm wavelength laser allows marking on plastic surfaces by smoothly melting the surface layer without creating pinholes or cracking the inner structure. This is the ideal solution for plastics being produced by polycondensated thermoplastic materials from the family of polyesters. PET is widespread in the beverage industry and is mostly used for producing bottles.



## Film and Foil – 10,2µm Wavelength

The 10.2µ wavelength is ideally suited to marking on thin films and any type of packaging foil. Best results can be expected on painted films and foils with a thin ink layer on top. The laser energy removes the ink and generates a contrast to the next bottom layer e. g. to the metalized composite or aluminium. Packaging materials which absorb this wavelength very well and therefore generates best Laser CO2 print quality are PE, HDPE, LDPE, PP, OPP, OPA, PA, PMMA, POM, PUR, ABS, PVC.



## Paper, cardboard and glass – 10.6µm Wavelength

The CO2 laser radiation of 10.6µm wavelength gets well absorbed in applications that process materials ranging from thin paper to cardboard type packaging. Extremely good print results are also achieved on any kind of glass products. This wavelength is the most common one available with CO2 lasers and perfectly suits the majority of packaging applications.

# Specifications

Hitachi Series	LM-C310S	LM-C330S	LM-C310P	LM-C330P
Laser Technology	CO2, Vector			
Laser Power	10 W	30 W	10 W	30 W
Laser wave length	9.3µm (e.g. PET), 10.2µm (e.g. OPP, PP, PE), 10.6µm (e.g. Paper, Cardboard)			
Coding Area (mm) / Spot size (µm)	60 × 60 / 385 (Standard) 75 × 75 / 506 (Option) 100 × 100 / 810 (Option) 100 × 100 / 972 (Option) 150 × 150 / 1296 (Option) 200 × 200 / 1660 (Option) 250 × 250 / 2213 (Option)		60 × 60 / 192 (Standard) 75 × 75 / 253 (Option) 100 × 100 / 405 (Option) 100 × 100 / 486 (Option) 150 × 150 / 648 (Option) 200 × 200 / 830 (Option) 250 × 250 / 984 (Option)	
Red Aim Beam Pointer	Standard (Red semiconductor, Wave length 655 nm, Class 2 Laser)			
User Interface	Coloured Touch Screen / PC			
Shutter	Automatic Electromechanical Shutter			
Cabinet Protection	IP 54			
Communication Interface	Ethernet, USB for Text and Backup Management			
Weight	17 kg		25 kg	
Dimension	196 × 148 × 698 (mm)		216 × 179 × 709 (mm)	
Laser Status Signals	Flexible I/O Configuration			
Laser Status Indicator	Ready (Green) / Laser (Blue) / Alarm (Red)			
Power supply	AC100 ~ 120V ± 10%, AC200 ~ 240 V ± 10% (50 / 60 Hz)			
Power Consumption	300 VA		600 VA	
Temperature range	5 ~ 40 °C			
Humidity range	35 ~ 95 %			

**Options:** Barcode Reader Connection, Special Communication Function, External Signal Function  
 1. Hitachi Industrial Equipment Systems Co., Ltd. (Hitachi) shall not be liable for any manufacturing loss, or any product damage due to trouble or malfunction of the ink jet printer.  
 2. Hitachi continually improves products. The right, therefore, is reserved to alter the design and/or specifications without giving prior notice.


## Global standards

■ **Conformity to global standards**  
 CE, UL, c-UL, c-Tick approvals.




## Dimensions of Laser and Touchpanel (mm)


### LM-C310S

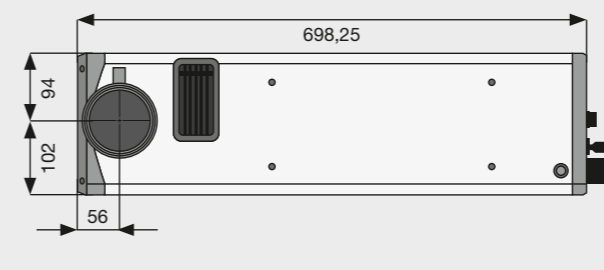

### Touchpanel

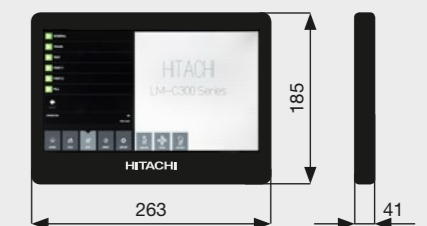

### LM-C310P

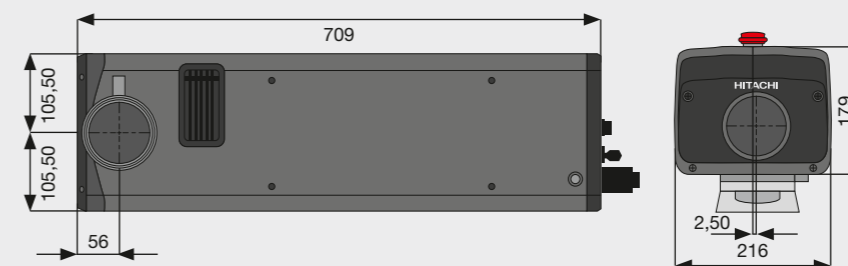



Please follow us:



More information about  
Hitachi Coding & Marking products:  
[www.hitachi-industrial.eu](http://www.hitachi-industrial.eu)

Hitachi Europe GmbH, Am Seestern 18, D-40547 Düsseldorf  
Phone: +49(0)211-5283-0, Fax: +49(0)211-5283-649  
[www.hitachi-industrial.eu](http://www.hitachi-industrial.eu), [info@hitachi-ds.com](mailto:info@hitachi-ds.com)  
© Hitachi Industrial Equipment Systems Co., Ltd., Japan

All company and product names in this brochure are  
the property of the respective companies.